

Hinged Doors



Structural .

Strong hollow rails, stiles and mid rails give this Hinged Door the edge in strength and serviceability. The Wintec French Door can be coupled with all other Wintec Products. Mitred door sash is 75mm x 48mm and can also be double glazed.

Weather .

Unique "Z" seals as well as Q'lon seals for the Head, Sill and Stiles provides excellent sealing from the weather.

Aesthetics .

Rounded rails help to give this door the classy yet structurally sound look. This system is available in various glazing options and styles.

Additional Benefits .

This system can be individually glazed and is also available in a federation style. Doors can be opened inwards as well as outwards with the Triple 1 framing system.

Note .

It is not a requirement for hinged doors to be tested in accordance to AS2047. It is an initiative of Wintec Aluminium to achieve ratings on air infiltration and water penetration for all window and door products.



Tripole 1 French Door


- Full perimeter frame sealing system using Q'Lon foam seals
- Self draining hollow inward and outward opening sills
- Rated sill is tested to 200Pa water penetration resistance
- Double rebate jambs suited for security door
- Suited to double glazing



Hinged Door - OPENING IN



A - A

Technical Configurations - Scale 1:2

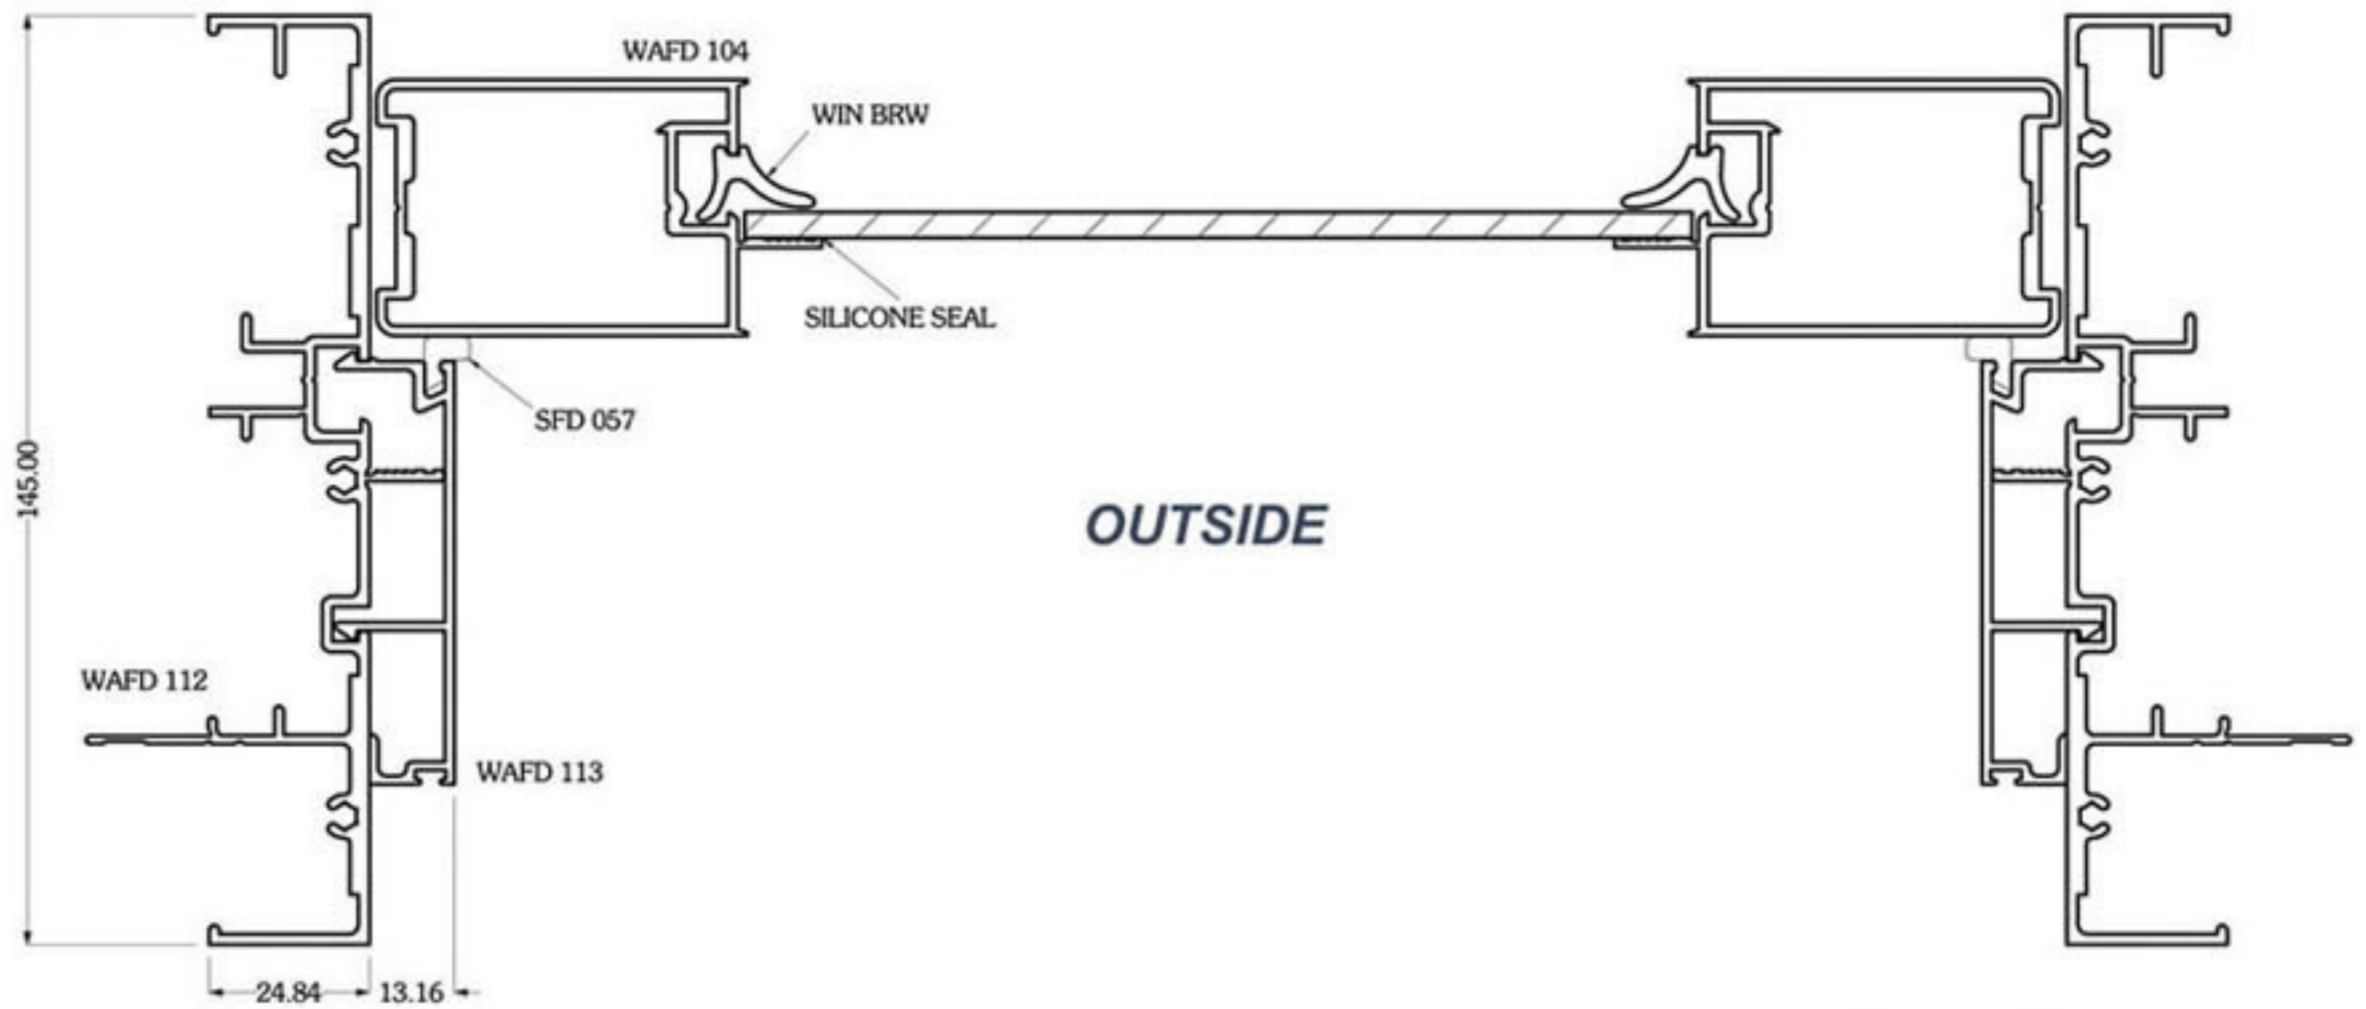

B - B

Typical French Door - VIEW FROM OUTSIDE

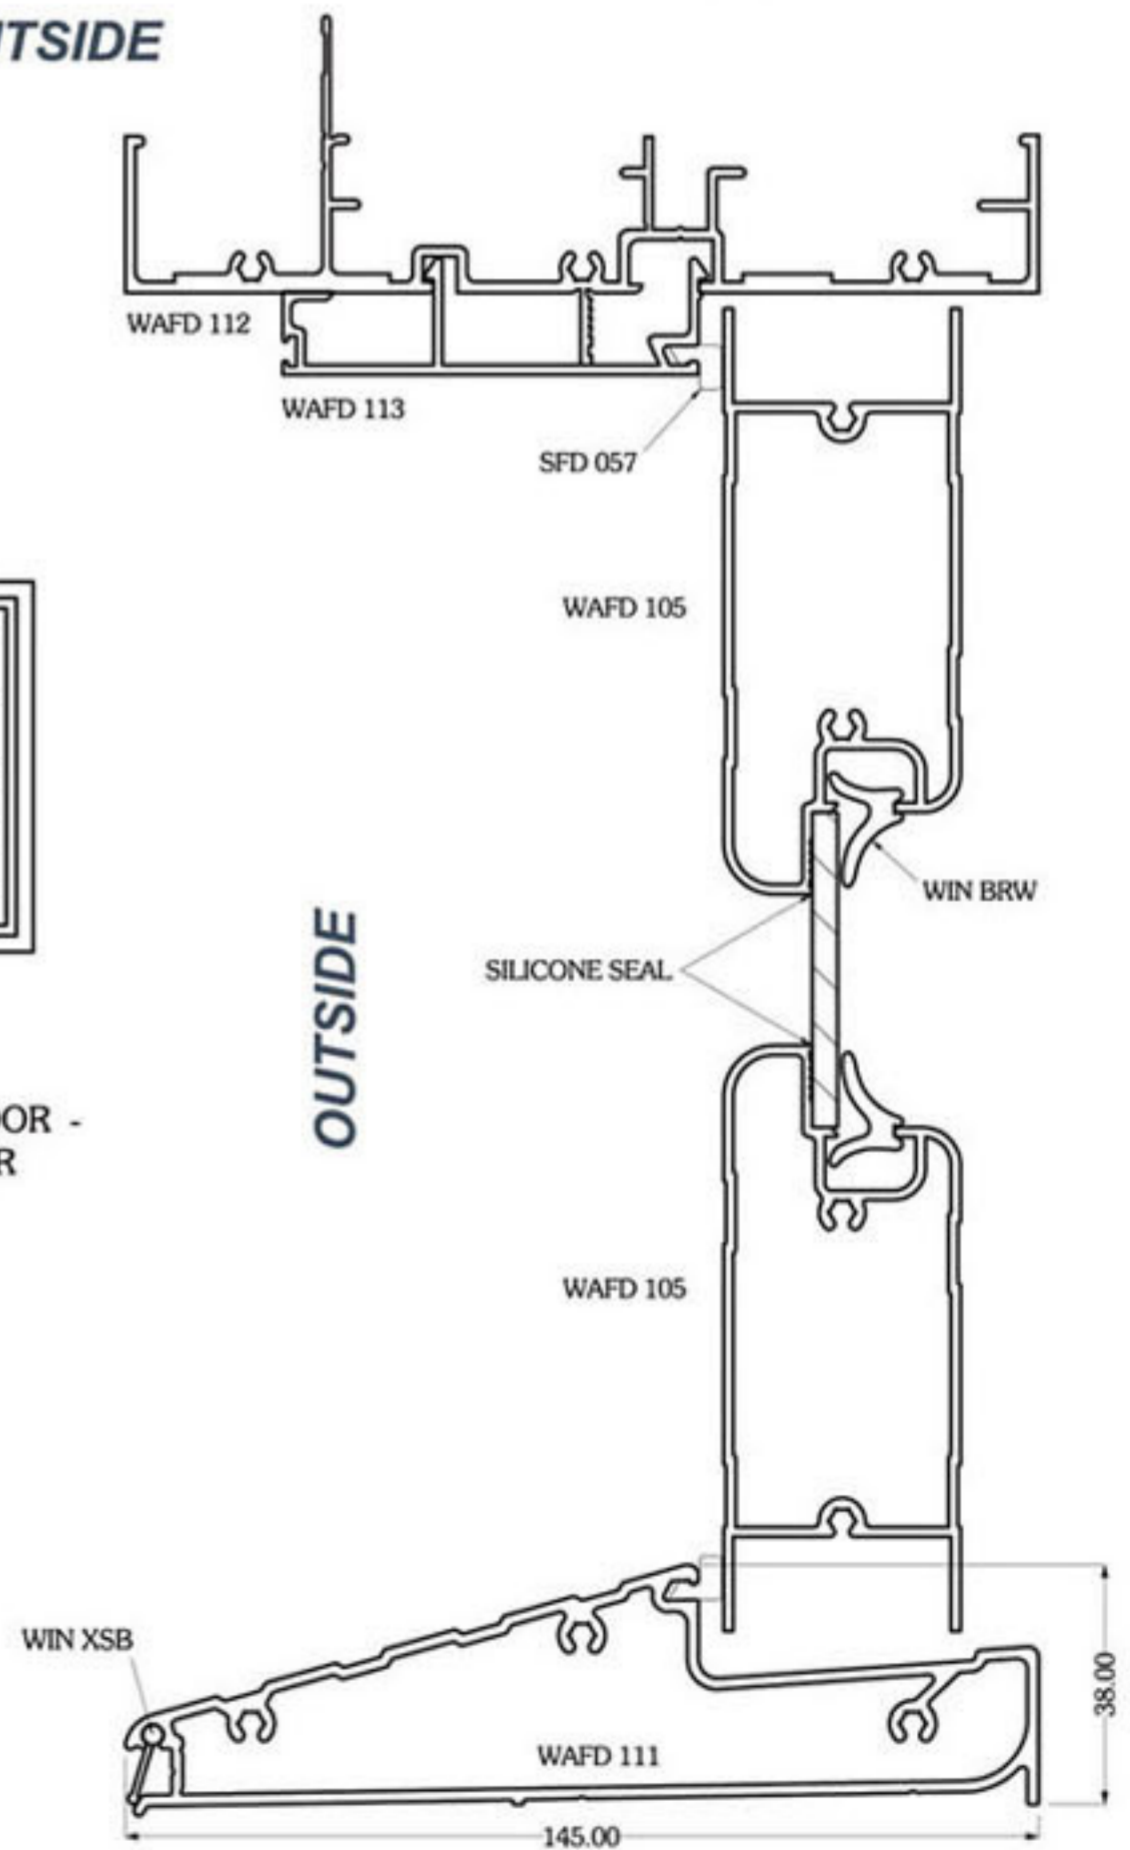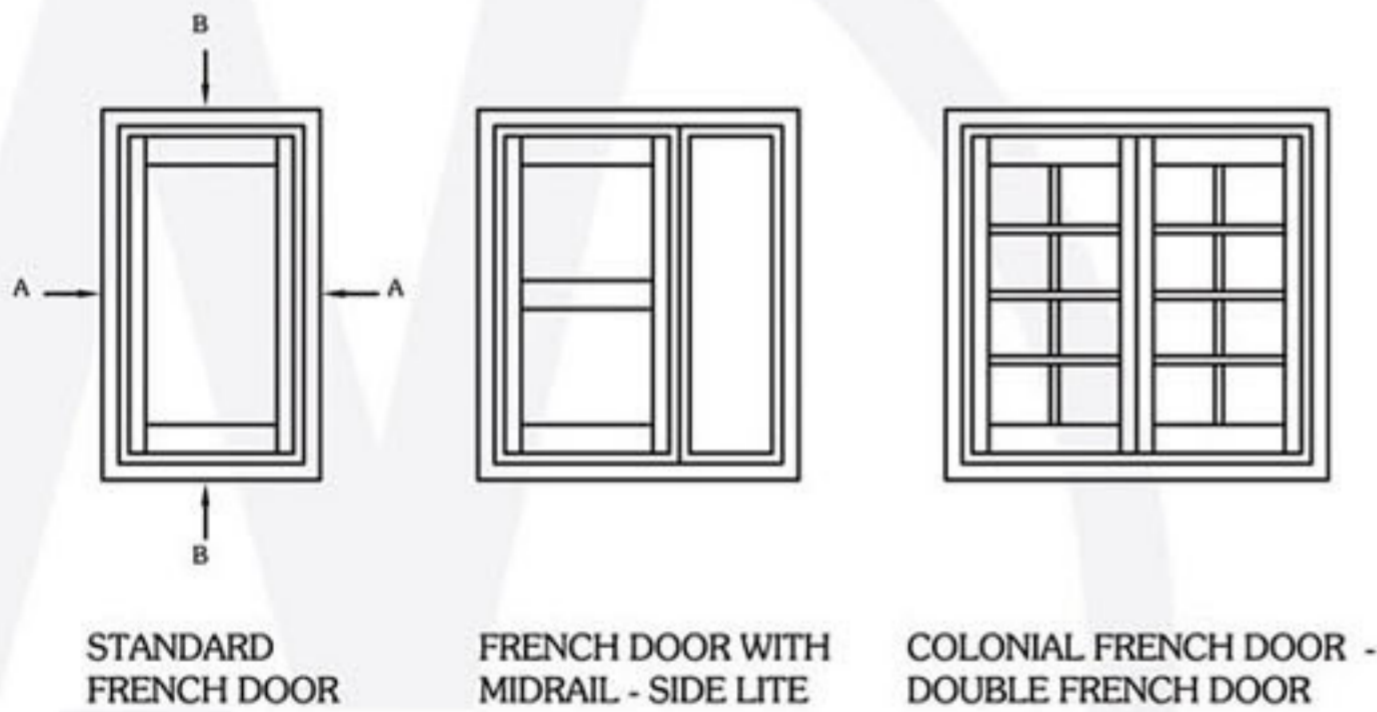

Contact your local Wintec Fabricator for other configuration options.

Hinged Door Hardware




Lever Handle



Multi Point Locking

Maximum Sizes Table

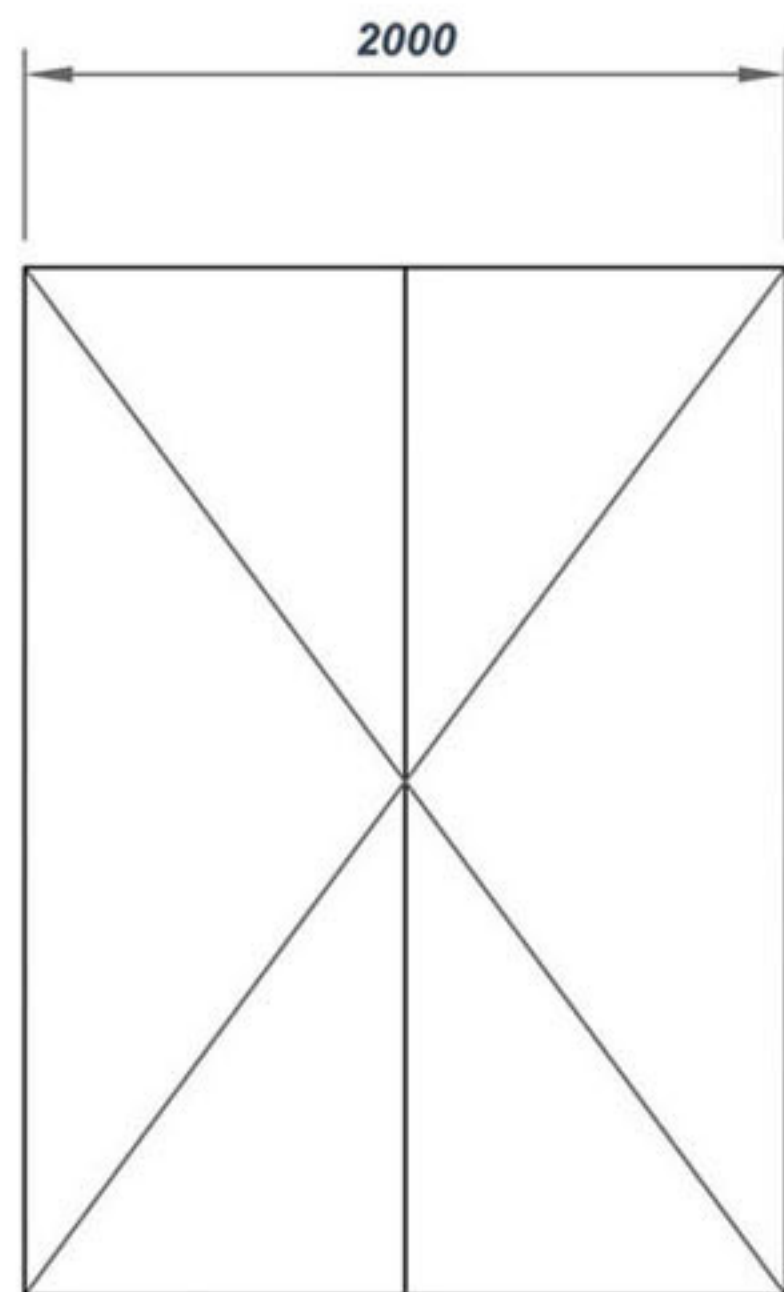

***Note:** For products or configurations outside of these sizes, or pressures exceeding 1000Pa please contact your nearest Wintec Fabricator